



caracol<sup>®</sup>  
*Creating Waterfall*

# Rainwater System

A complete range of roof drainage products





DE  
Cocktailbar  
in  
schonsten  
Wohnung  
in  
Potsdam



# Caracol Roof Drainage

## *Creating Waterfall*

CARACOL rainwater system is designed to integrate aesthetically and functionally with the rest of the roof. The name is inspired by a beautiful waterfall in Brazil. Studies of forces and dynamics in natural water courses have given us completely new insights into key concepts such as functionality and durability.

Many years of close collaboration with sheet metal workers and other professionals has given us invaluable knowledge about the expectations and needs of the market.

In addition to extreme durability, this system also provides exceptional fitting accuracy, which makes it a delight to install.


CARACOL is manufactured from top quality raw material and with high performance. In our fully automated production line in Malmö, Sweden, you will only find the very latest tools and machines from the world's leading manufacturers.

All of our production lines consist of computer-controlled, fully automated machines and industrial robots. This is to ensure that we can fulfil both the toughest technical specifications and environmental demands.

An important component in our logistics is stock holding. In order to ensure rapid delivery to our customers, the ability to store thousands of transport pallets has a key role. We have therefore built a very large storage area next to the production facility.

These insights and experiences together have helped us to develop a product system that will definitely handle roof drainage simply, effectively and for a very long time.


Best regards,

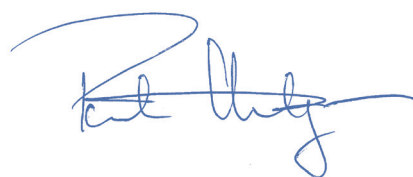

Pontus Holgersson  
Managing Director


# Caracol HANG GUTTER

Hang gutters are available in dimensions 125, 150 mm and in ten different colours with the sharpest painting system on the market, KARAT.

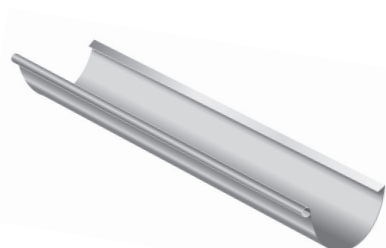

## HANG GUTTER


**Diameter** | 125, 150



## GUTTER ANGLE INNER


**Diameter** | 125, 150

**Angle** | 45, 90, 135



## GUTTER JOINT

**Diameter** | 125, 150



## GUTTER ANGLE OUTER

**Diameter** | 125, 150

**Angle** | 45, 90, 135



## GUTTER BRACKET

**Diameter** | 125, 150

**Length** | 70, 160, 210



## QUICK BRACKET

**Diameter** | 125, 150

**Length** | 145, 195, 315



## COMPACT BRACKET

**Diameter** | 125, 150




## ADJUSTABLE BRACKET

**Diameter** | 125


# with Accessories

In addition to extreme durability, this system also provides exceptional fitting accuracy, which makes it a delight to install.



**GUTTER END**

**Diameter** | 125



**UNIVERSAL GUTTER END**

**Diameter** | 125, 150



**STAY STRAP**

**Length** | 280



**HOPPER HEAD**

**Diameter** | 125/75, 125/90  
125/100  
150/90, 150/100  
150/110



**OVERFLOW PROTECTION  
ANGLED**



**OVERFLOW PROTECTION  
STRAIGHT**

# Caracol DOWNPIPE

Pipes and holders in dimensions 75, 90, 100 and 110 mm including all accessories necessary for your installation.



## PIPE BEND

<b>Diameter</b>	75, 90, 100, 110
<b>Angle</b>	70



## INTERMEDIATE PIPE

<b>Diameter</b>	75, 90, 100, 110
<b>Length</b>	1000



## PIPE KNEE

<b>Diameter</b>	75, 90, 100
-----------------	-------------




## PIPE BRACKET (WOOD)

<b>Diameter</b>	75, 90, 100, 110
-----------------	------------------




## CONNECTING DOWNPIPE SHOE

<b>Diameter</b>	75, 90, 100, 110
-----------------	------------------



## BRANCH PIPE

<b>Diameter</b>	75, 90, 100, 110
-----------------	------------------



## FOLDING DOWNPIPE SHOE

<b>Diameter</b>	75, 90, 100
-----------------	-------------



## SELF-CLEANING LEAF TRAP (PLASTIC)

<b>Diameter</b>	90, 100
-----------------	---------

# with Accessories

A complete range of rainwater products that is guaranteed to handle roof drainage simply, effectively and for a very long time



## SLIDING PIPE

**Diameter** | 75, 90, 100



## HOPPER

**Diameter** | 75, 90, 100, 110



## PIPE BRACKET (STONE)

**Diameter** | 75, 90, 100, 110  
**Spike (L)** | 150, 175



## TRAP CONNECTOR (PLASTIC)

**Diameter** | 90, 100



## LEAF TRAP (PLASTIC)

**Diameter** | 90, 100



## OUTLET SHOE

**Diameter** | 75, 90, 100, 110



## DOWNPIPE

**Diameter** | 75, 90, 100, 110

# Colours & Warranties

Artic white  
AR9002

Dark brown  
AR8017

Brown  
AR8019

Brick red  
AR8004

Red  
AR3009

Silver metallic  
AR9006

Dark silver metallic  
AR9007

Anthracite grey  
AR7011

Black  
AR9005


Alu-zinc  
AR0185

## KARAT - Long lasting with a stylish finish.

In order to increase the lifetime of CARACOL products even further and increase their aesthetic value, we coat both sides of the product with KARAT, the sharpest painting system on the market.

KARAT is a genuine colour coating system that provides optimal values for good weather and wear resistance while maintaining high gloss and colour retention.

**A product that we guarantee for 20 years without hesitation.**

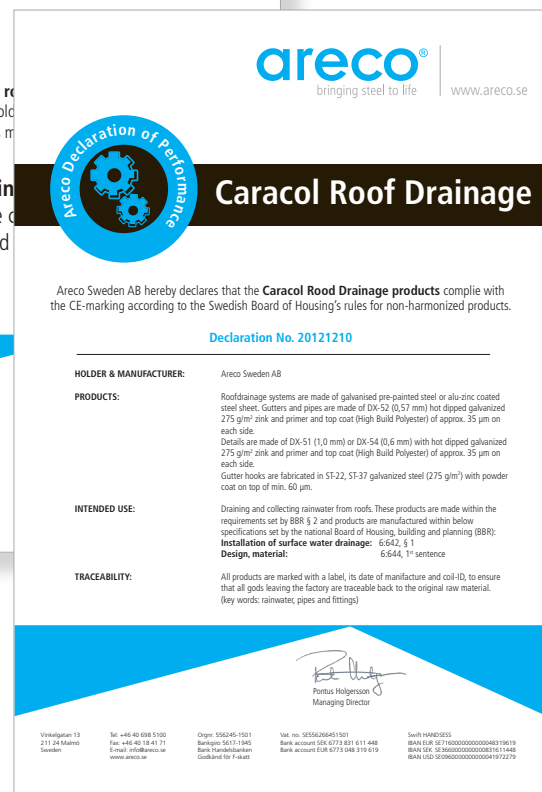



# Mounting Instructions

## Tools

Areco's Rainwater system is constructed so that installation is easy. The tools you will need are: pliers, hammer, screwdriver, hacksaw, tape measure and string. If you need a tool to bend the brackets you can hire one from your builders' yard.

## Sawing and cutting


Use a hacksaw when sawing rainwater pipes and guttering. Curve shears must not be used because swarf and the heat from the disc can damage the sheet metal's outer layer and galvanised surface.

## Estimating quantities


The amount of guttering, rainwater pipes and accessories needed will vary depending on your house. Calculate on the basis that each drainpipe can cope with a maximum gutter length of 12 m. Fascia brackets should be mounted so that the guttering falls towards the drainpipe. Bracket spacings should not exceed 600 mm, with a fall of 5 mm per metre. The dimensions of the guttering and drainpipes should be chosen according to the surface area of the roof.

- Roof size up to c. 50 m<sup>2</sup> (drainage area): guttering and pipe dimensions 125/75 mm
- Roof size c. 50-100 m<sup>2</sup> (drainage area): guttering and pipe dimensions 125/90 mm
- For larger surfaces guttering and pipes with dimensions 150/100 mm are available

## INSTALLING YOUR GUTTERING

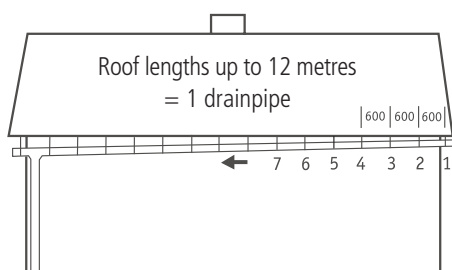

Decide in which direction the gutter is to fall. Choose which bracket you will use. Fix the first and last bracket c. 10 cm from the edge of the roof. Other brackets should be fixed with 600 mm centres (see sketch). Fall 5 mm/metre. Fix the brackets with screws or ring shank nails.

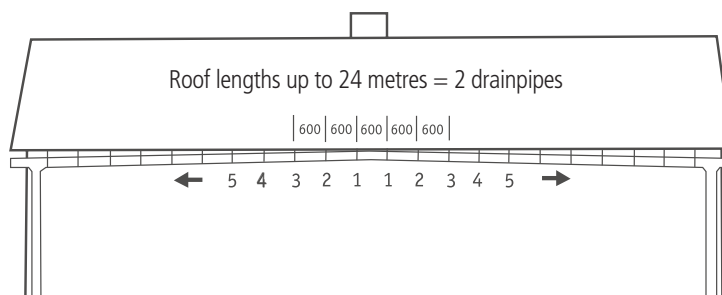


Choose which bracket you will use. Begin to fix the brackets 1-1 c. 300 mm from the middle and fall in both directions. The last bracket should be fixed c. 10 cm from the edge of the roof. The other brackets should be fixed with 600 mm centres (see sketch). Fall 5 mm/metre. Fix the brackets with screws or ring shank nails.

## FITTING GUTTER BRACKETS




### Securing to fascia board

Compact brackets or short iron brackets are fixed to the fascia board. If this is angled use adjustable bracket. With roof lengths up to 12 metres fit the first and last bracket c. 10 cm in from the edge of the roof. Fall 5 mm per metre. Attach a string to the underside of the first bracket (see arrow). Attach the string to the last bracket, check that it's taut and the fall is correct. Use the taut string to help you fix the other brackets with 600 mm centres. With roof lengths longer than 12 metres start fitting from the centre.

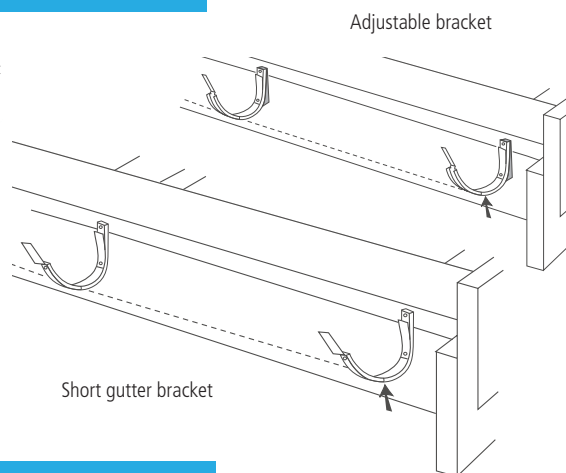

## BENDING GUTTER BRACKETS

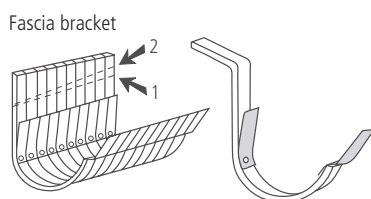


### Securing to lathes


Medium/long brackets must be bent so that the gutter has a fall. Line up all the brackets you will need. Draw a line over across all the brackets where they should be bent (arrow 1). Measure from the line on the last bracket so that the fall will be 5 mm/metre. Mark a new line (arrow 2). Bend the brackets according to this line.

# Mounting Instructions

## FITTING THE GUTTER




Place the gutter in the brackets, press down the front of the gutter on the brackets and bend the tab over. Then push the gutter down so that it is resting on the bracket and bend the second tab over.




When quick bracket is used the gutter's front edge should be pushed into the hook. Then the gutter should be pressed down so that it locks under the notch in the back of the bracket.

## FITTING RUNNING OUTLETS




Mark on the gutter where the drainpipe is to be placed. Saw two angled cuts so that you make an opening of c. 10 cm. Bend the edges of the hole down slightly so that the water can run into the drainpipe.





Press the folded edge of the running outlet into the front edge of the gutter. Then move the running outlet down towards the back of the gutter. Bend the outlet's tabs over the back of the gutter so that it locks in place.


## FITTING STOPENDS



The stopend is combined, for both left and right attachment. Bend off the ear and round, according to the etched line in the stopend, on the side you are **not** going to fit it (see sketch).




Place joint sealant according to the dotted line. Attach strip sealant on the stopend. Position the stopend in c. 2 cm in the front edge of the gutter, turn it down into the gutter and push it completely in.



## JOINTING WITH UNION CLIPS




Bend the union clip slightly outwards before fitting. Then place at least two strings of strip sealant along the whole of the rubber seal that is placed in the union clip.



Push the gutters towards each other and put a little joint sealant above and below the joint.




Continue by fastening the union clip over the back edge of the gutter (1) (see previous picture also) and then over the front edge of the gutter (2) (round).



Then push the union clip together with your hand (1) so that it is in contact with the gutter. Then fold over the tab so that it is locked in place (2).


## JOINTING WITHOUT UNION CLIPS

Fold up a c. 4 cm long flap along the back edge of the lower gutter. Place joint sealant according to the dotted lines and push in the upper gutter in the lower according to the picture. Fold down the upper gutter in the lower, fold over the flap and push together so that both gutters are locked in place.

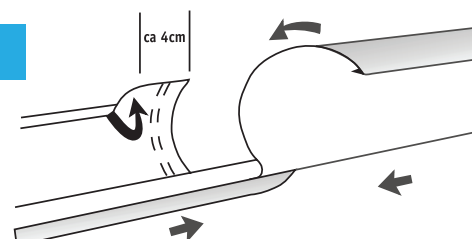


# Mounting Instructions

## ANGLES & INTERMEDIATE PIECES

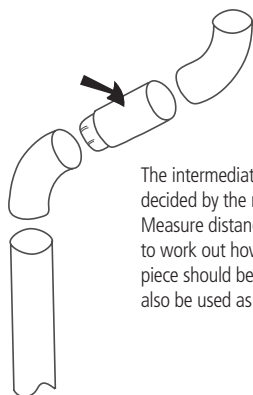

The intermediate piece's length is decided by the roof's overhang. Measure distance A and use the table to work out how long the intermediate piece should be. Cut-off drainpipes can also be used as intermediate pieces.



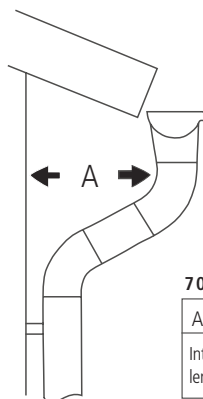


70° ANGLE

A cm	80	70	60	50	40	30
Intermediate piece's length in cm	app. 70	app. 60	app. 50	app. 40	app. 30	app. 20

## USEFUL ACCESSORIES


1. Branches are used if, for example, you wish to drain several roofs into the same drainpipe.
2. Collapsible spouts are used if you want to be able to collect the rainwater. Fit the collapsible spout into the drainpipe.
3. Leaf guards and leaf filters prevent leaves and debris getting into the ground drains. Sleeves are available for different pipe dimensions.
4. A drain cuff is used between the drainpipe and the ground drain. A run-off filter prevents debris in the ground drain and is mounted directly in it.
5. A spout is fitted when the drainpipe is not attached to the drain system. Use screws or rivets when you fit the spout to the drainpipe.

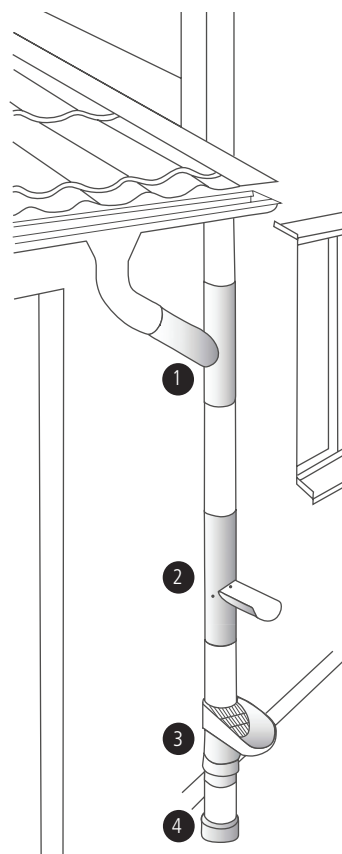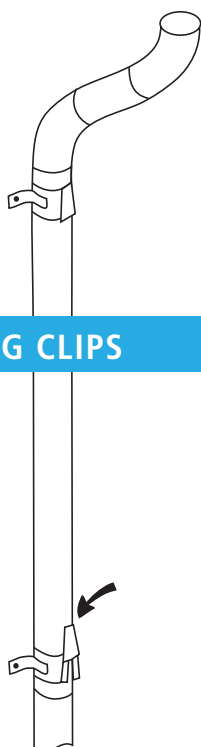

## FITTING CLIPS

The clip is fitted c. 10 cm under the lower angle. The distance between clips should not be greater than 2 metres. The clip is locked in place with a wedge (wedge's broad side downwards). Hammer the wedge into place with a hammer and wooden block. Clips are available for both timber and stone walls. In stone or brick walls holes should be pre-drilled for attaching the clips (drill in the mortar).

Fit the pipe details on to the drainpipe and attach to the running outlet. Check that the pipe is straight.





**Areco Profiles AB**

Vinkelgatan 13  
211 24 Malmö  
Tel: +46 40-698 5100  
Fax: +46 40-18 41 71  
E-mail: [info@areco.se](mailto:info@areco.se)  
[www.arecoprofiles.se](http://www.arecoprofiles.se)